

XM1800S

DYNAMIC MICROPHONE



Technical Specifications

Version 1.2 June 2003

ENGLISH



- ▲ Dedicated vocal and instrument mic brings unbelievable quality to your studio and live performance
- ▲ With On/Off switch
- ▲ Extremely high signal output makes your voice cut through
- ▲ Ultra-low distortion for super clean sound
- ▲ Presence lift in critical mid-range gives you maximum voice projection
- ▲ Exceptional off-axis rejection eliminates feedback problems
- ▲ Super rugged construction copes with your toughest live assignments
- ▲ Foam-lined impact-resistant carrying case included
- ▲ Microphone stand adapter included
- ▲ Designed in Germany. Manufactured under ISO9000 certified management system

www.behringer.com



DYNAMIC MICROPHONE XM1800S

POLAR PATTERN

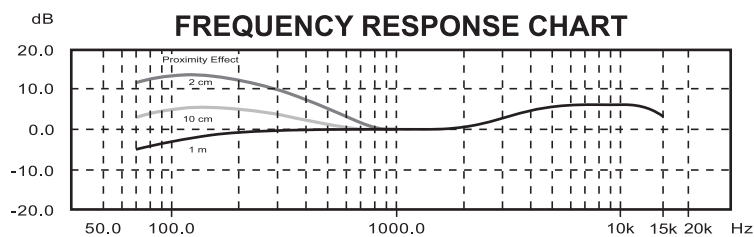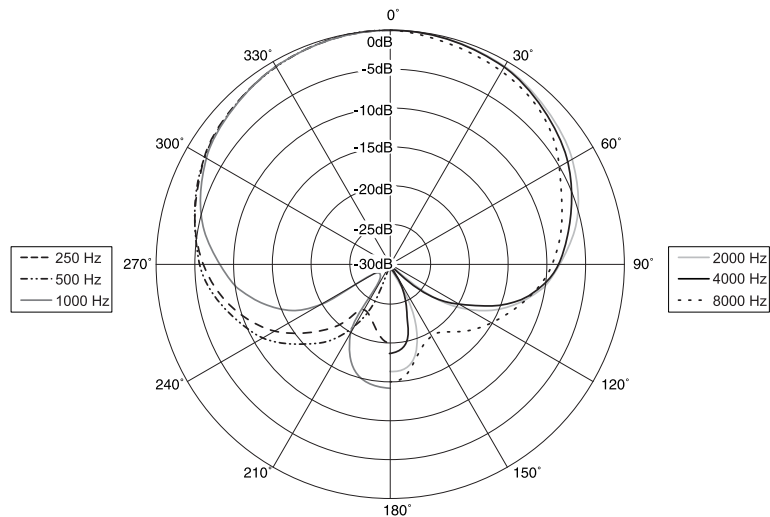

SPECIFICATIONS

Type:	Dynamic
Frequency response:	80 Hz - 15 kHz
Polar pattern:	Super cardioid
Impedance:	600 Ω
Sensitivity:	-52 dBV (0 dBV = 1 V/Pa), 2.5 mV/Pa
Connector:	3-pin balanced XLR (male)
Dimensions:	
Head length	57.5 mm
Main unit length	117.5 mm
Total length	175 mm
Weight:	230 g

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.