

BROADCASTER

Precision 1" Broadcast Condenser Microphone

RØDE[®]
MICROPHONES




Features

- HF2 1" capsule with gold plated diaphragm
- On-Air indicator LED
- Ultra low noise
- Voice tailored low-cut feature
- Internal pop-filter to reduce plosives
- Rugged stainless steel body
- Designed and manufactured in Australia
- Full 10 year warranty*


Specifications

Acoustic Principle	Pressure gradient	Directional Pattern	Cardioid - end address
Frequency Range	20 Hz-20 kHz	Sensitivity	-34 dB re 1 Volt/Pascal (20 mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Output Impedence	40Ω	Dimensions	Length - 167mm (6.574") Diameter - 50mm (1.968")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)	Shipping Weight	840g
Net Weight	577g		

Frequency Response

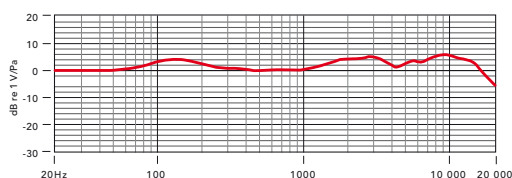

Polar Pattern

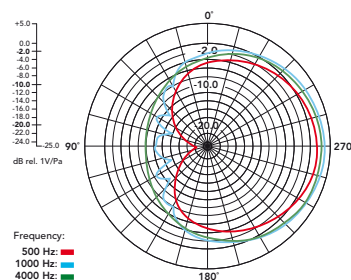

Included Accessories

- 5 pin 'on air' indicator adaptor
- RM2 stand mount
- ZP1 zip pouch



www.rodemic.com

*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 4189 Santa Barbara CA 93140 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071