

Read Me First!

If you are unfamiliar with these products, please pay close attention to the dimensional requirements for installation. Failure to do so can result in permanent damage to the pickup.

Installation of this product is a straightforward procedure, but we recommend this job only if you are an experienced repair technician.

Preliminary

The Nashville Series flat-top and two piece archtop mandolin pickups feature a piezo-ceramic element preinstalled in the bridge. Use your preferred method for bridge fitting.

For the flat-top model (M-400), up to .050" may be removed from either the top or bottom of the bridge (Figure 1).

For the archtop model (M-300), up to .180" may be removed from the base during fitting (Figure 2).

Special care must be taken not to damage the pickup wire when tooling the bridge blank.

Installing The Jack

After fitting the pickup, place the jack in a comfortable location (Figure 3) and tighten it with the enclosed turnbuckle key (Figure 4). Be careful not to scratch the side of your instrument.

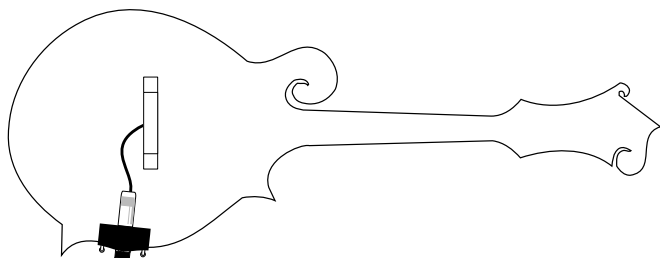


Figure 3.

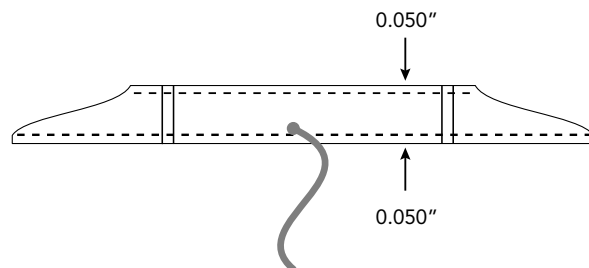


Figure 1. M-400

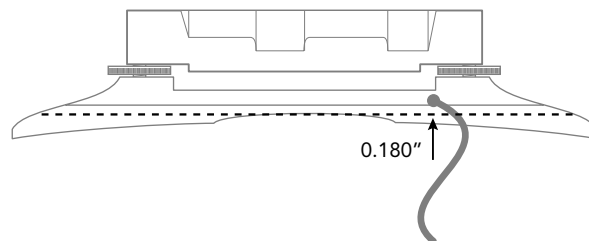


Figure 2. M-300

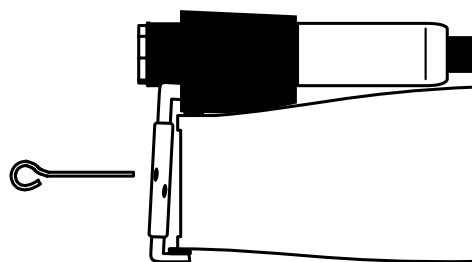


Figure 4.