





Quick Start Guide for ZLX-12P and ZLX-15P Loudspeakers

Packing List

- A. ZLX-12P unit, 12" Two-Way Powered Loudspeaker
OR
ZLX-15P unit, 15" Two-Way Powered Loudspeaker
- B. ZLX Series Loudspeaker Owner's Manual
- C. Power Cord



A











B

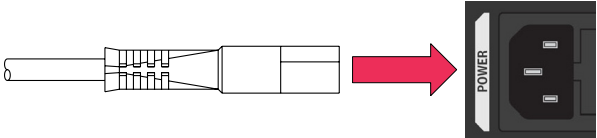


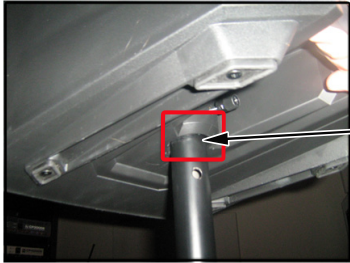
C

Instructions

Step	Illustration
1. Connect the AC power cord from a grounded line receptacle to MAINS IN.	
2. Switch POWER to ON.	
3. All input channels should be turned to the left before connecting any jack.	
4. Connect the 3.5 mm mini jack, XLR or TRS cable from an audio source to AUX IN (A), INPUT 1 (B) or INPUT 2.	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; align-items: center; margin-bottom: 20px;"> A  </div> <div style="display: flex; align-items: center;"> B  </div> </div>

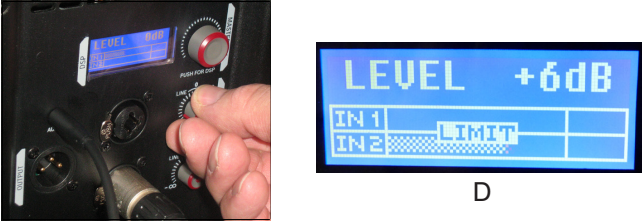Step	Illustration
5. Push and hold DSP knob to select application MODE and LOCATION. Select EXIT to return to the home screen.	
6. From the DSP home screen increase the input gain knob (C) while viewing the VU meters. (D) To ensure proper gain structure signal present will peak at no more than 75% in the VU meters. Decrease gain by turning the knob to the left to avoid clipping if too much signal is present.	
7. Slowly adjust MASTER VOL to the desired volume.	

Instructions—Pole Mounting

Step	Illustration
1. Ensure the pole is firmly in place.	
2. Use two hands to lift the loudspeaker with the hi/lo grip handles.	
3. Set the pole cup located on the bottom of the loudspeaker onto the pole.	
4. Tighten the thumb screw to secure the loudspeaker to the pole.	