

PRX735


15" THREE-WAY FULL-RANGE
MAIN SYSTEM

COMPACT, ULTRA-LIGHTWEIGHT SYSTEMS... PERFORMANCE YOU CAN TRUST

The PRX735 is the next step in the highly successful PRX Series and introduces the first use of JBL's patented Differential Drive® Technology with ferrite drivers. Differential Drive technology incorporates lower mass in the ferrite magnet for reduced weight while maximizing power amp efficiency for greater heat dissipation and increased power handling. Powering the PRX735 is a 1500 Watt high performance, exceptionally low distortion tri-amplification system engineered to deliver clean power with maximum headroom to efficiently deliver smooth high frequencies and rich, deep bass response even at very high sound power levels. Compact, ultra-lightweight, the PRX735 uses JBL's tour tested technology throughout so you can trust it to deliver a lifetime of reliable performance.

+ **1500 WATT**
HIGH-PERFORMANCE
POWERED SPEAKER SYSTEM

+ **77 LB/34.9 KG**
FOR EASY PORTABILITY

+ 
90° H/50° V
BEST IN CLASS COVERAGE

KEY FEATURES

HIGH PERFORMANCE DRIVERS

37.5mm (1.5 in) Annular Polymer Diaphragm, Neodymium Magnet Compression Driver Resulting in Crystal Clear Highs and Sonic Accuracy. Wide coverage angles are achieved without compromise and harmonic distortion is minimized for maximum driver SPL without harshness.



LOW FREQUENCY

Tour tested Differential Drive technology delivers extended frequency response, high power output and low distortion in a dramatically lighter package. With the ferrite magnet positioned inside the dual-coil/dual-gap voice coil, heavy steel pole pieces are eliminated. The heat sink is the chassis itself, further lowering system weight while ensuring consistent, reliable performance.




AMPLIFICATION

Highly efficient Class-D amplification drives Maximum Sound Pressure Levels are the best indication of the performance of a powered speaker and all PRX700 Series excel in this critical specification. JBL's ability to maximize the speaker and amplifier performance guarantees ample power, accurate dynamics and sonic purity.





ROAD TOUGH CONSTRUCTION

Built from a combination of 25 mm (on the top and bottom for added rigidity) and 18 mm, strong, light-weight poplar plywood made structurally sound with tongue and groove joints. JBL's tour proven DuraFlex™ finish, grilles from dent-resistant 16 gauge steel, and light-weight glass-filled nylon handles ensure strength and durability. All M10 suspension points are constructed from 14 gauge steel and have been tested with a yield-strength of 1000 lbs. each. A seriously rugged package that will withstand the brutality of constant road use.

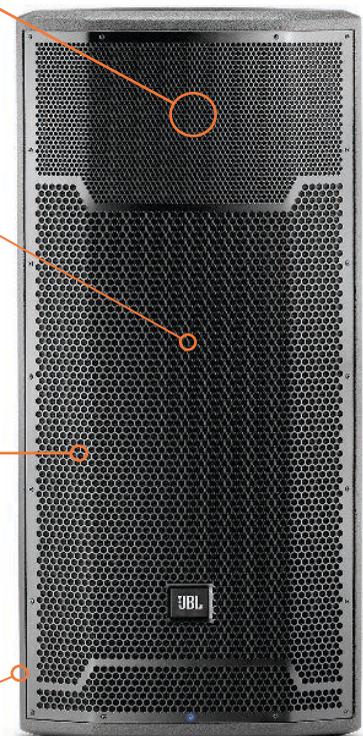

Hear the truth.





COVERAGE

System coverage is 90° horizontal and 50° vertical with excellent coverage throughout the system's bandwidth. The sound is smooth and consistent without hotspots so control is optimized.

CONFIGURATIONS

The PRX700 Series is a platform technology with a range of models that integrate seamlessly for multiple system options that excel in challenging audio environments and loud volumes. Perfectly capable of reproducing high fidelity full range sound without a subwoofer, add the PRX718XLF subwoofer for exceptional low frequency extension and sound pressure.

- Single speaker on a stand for public address
- Full-range stereo set up with two top cabinets and a sub-woofer for live performance or DJ
- Multiple cabinets for a scalable, highly professional sound reinforcement system
- Suspend any of the top cabinets for use in commercial installations or Houses of Worship

INPUT PANEL


An integrated limiter circuit on the inputs guarantees signal integrity. System performance is optimized through the use of sophisticated Digital Signal Processing for EQ, crossover, amplifier control, and protection.

- DSP Input limiter circuit, crossover, dynamic limiting, component optimization, selectable system EQ
- XLR-¼" combination mic/instrument inputs, RCA inputs, and XLR loop-through
- Easy to use mixing via selection switches on both the input and loop-thru


SPECIFICATION

PRX700


S E R I E S




PRX710




PRX712




PRX715




PRX715XLF



PRX718XLF



PRX725



PRX735

	PRX710	PRX712	PRX715	PRX715XLF	PRX718XLF	PRX725	PRX735
System Type:	Self powered 10", two-way, bass-reflex	Self powered 12", two-way, bass-reflex	Self powered 15", two-way, bass-reflex	Self powered 15", bass-reflex	Self powered 18", bass-reflex	Self powered 15", two-way, bass-reflex	Self powered 15", three-way, bass-reflex
Max SPL Output:	133 dB	135 dB	136 dB	131 dB	134 dB	139 dB	136 dB
Freq. Range (-10 dB):	50 Hz - 19.6 kHz	44.8 Hz - 19.6 kHz	42.9 Hz - 19.5 kHz	37 Hz - 113 Hz	30 Hz - 103 Hz	42 Hz - 18.5 kHz	35 Hz - 20 kHz
Freq. Response (±3 dB):	63.5 Hz - 18.5 kHz	55.7 Hz - 18.2 kHz	58.1 Hz - 17.2 kHz	44 Hz - 91 Hz	35 Hz - 87 Hz	49 Hz - 17 kHz	42 Hz - 20 kHz
Coverage Pattern:	100° x 60° nominal	90° x 50° nominal	90° x 50° nominal	-	-	90° x 50° nominal	90° x 50° nominal
Amplifier Design:	Class D	Class D	Class D	Class D	Class D	Class D	Class D
Power Rating:	1500 W (2 x 750)	1500 W (2 x 750)	1500 W (2 x 750)	1500 W	1500 W	1500 W (3 x 500)	1500 W (3 x 500)
Dimensions (mm):	498.7 x 335.6 x 322.3	612.4 x 384.6 x 341.4	714.4 x 445. x 358.7	547.1 x 445 x 580	690.4 x 523.2 x 723.9	1070.4 x 445 x 538	952.5 x 445 x 538
(H x W x D) (in):	19.63 x 13.21 x 12.69	24.11 x 15.14 x 13.44	28.13 x 17.52 x 14.12	21.54 x 17.52 x 22.48	27.18 x 20.6 x 28.5	42.14 x 17.52 x 21.18	37.5 x 17.52 x 21.18
Net Weight:	16.4 kg (36 lb)	19.4 kg (42.5 lb)	21.6 kg (47.5 lb)	25.4 kg (56 lb)	36.8 kg (81 lb)	37.19 kg (82 lb)	34.9 kg (77 lb)