

## BASS GUITAR SERIES

# LEGEND CA154

High SPL 15" four ohm woofer recommended for use in bass guitar cabinets or in a PA cabinet.



### SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	4 Ω
Power Rating**	
Watts	300 W
Music Program	600 W
Resonance	51 Hz
Usable Frequency Range	45 Hz – 3 kHz
Sensitivity***	96.9 dB
Magnet Weight	56 oz.
Gap Height	0.38", 9.7 mm
Voice Coil Diameter	2.5", 64 mm

### THIELE & SMALL PARAMETERS\*

Fs	51 Hz
Re	2.92 Ω
Le	0.8 mH
Qms	4.94
Qes	0.54
Qts	0.49
Vas	3.82 cu.ft., 108.2 liters
Vd	411.9 cc
Cms	0.11 mm/N
BL	12.21 T-M
Mms	86 grams
EBP	94
Xmax	5 mm
Sd	823.7 cm <sup>2</sup>
Xlim	8 mm

### MOUNTING INFORMATION


Recommended Enclosure Volume	Sealed	40–71 liters, 1.4–2.5 cu.ft.
	Vented	45–170 liters, 1.6–6 cu.ft.
Driver Volume Displaced		0.128 cu.ft., 3.62 liters
Overall Diameter		15.15", 384.8 mm
Baffle Hole Diameter		13.87", 352.3 mm
Front Sealing Gasket		Yes
Rear Sealing Gasket		N/A
Mounting Holes Diameter		0.25", 6.4 mm
Mounting Holes B.C.D.		14.56", 369.8 mm
Depth		6.25", 158.8 mm
Net Weight		11.9 lbs , 5.4 kg
Shipping Weight		14.1 lbs , 6.4 kg



### MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented core
- Pressed Steel basket
- Treated paper cone
- Sealed cloth surround
- Treated paper dust cap

### 4 Ω FREQUENCY RESPONSE\*

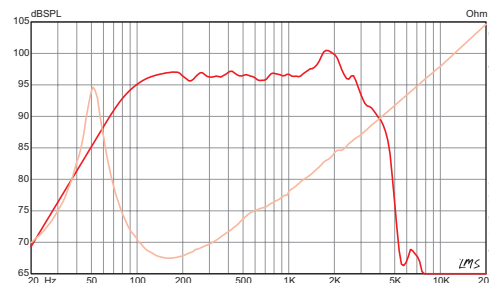



*From design and manufacturing to the stage or studio. Once you've experienced the performance of Eminence, you'll never accept anything else.*

## MISSION STATEMENT

*Eminence is dedicated to providing the best Quality, Value and Service to meet our customers' needs.*

## FOOTNOTES

- \* Please consult [www.eminence.com](http://www.eminence.com) for specifications of models with alternative impedances.
- \*\* Multiple units exceed published ratings evaluated under EIA 426A specification while tested in a free-air, non-temperature-controlled environment.
- \*\*\* The average output across the usable frequency range when applying 1W/1m into the nominal impedance. i.e: 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. x 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Carver PM-120 amplifier | 2700 cu. ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).
- \*\*\*\* BETA 8CX, 10CX, and 12CX are coaxial speakers with tweeter sold separately. Published usable frequency response contingent upon use of ASD:1001 HF Driver.
- \*\*\*\*\* Multiple units exceeded published ratings evaluated under EIA-426A or AES specification while mounted on Eminence's H290, H290S, or H2EA horn in a non-temperature-controlled environment.
- \*\*\*\*\*The average on axis output across the entire usable frequency range when applying 1W/1m into the nominal impedance, i.e. 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft x 2ft baffle is built into the wall with horn front mounted | Carver PM-120 amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).

Prices, specifications and product cosmetics are subject to change without notice.

**EMINENCE SPEAKER LLC**

838 Mulberry Pike, Eminence, KY 40019



Follow us:

[EMINENCE.COM](http://EMINENCE.COM)

